



# 2510 and 2510-2 Remote Airborne Particle Counters

## 1.0 CFM (28.3 LPM)

**PARTICLES  
PLUS®**




The 2510 and 2510-2 particle counters provide a range of particle size measurement from 0.5 to 25.0  $\mu\text{m}$  at a flow rate of 1.0 CFM (28.3 LPM). These sensors allow for efficient particle counting with specifications that exceed the ISO 21501-4 and JIS B9921 calibration standards.

These sensors have 4 fixed particle size channels and are equipped with an integral critical orifice and flow sensor to provide a stable flow rate from an external vacuum source. Integration into a building automation or facility monitoring system is easy via isolated RS-485 Modbus communication.

### 2510 and 2510-2: Features and Benefits

- 2510: Measures 0.5  $\mu\text{m}$  to 25.0  $\mu\text{m}$  (up to 4 channels)
- 2510-2: Measures 0.5  $\mu\text{m}$  to 25.0  $\mu\text{m}$  (up to 2 channels)
- 1.0 CFM (28.3 LPM) flow rate
- Long life laser diode technology
- Particle concentrations up to 1,500,000 Particles/ft<sup>3</sup> @ 10% coincidence loss
- Internal critical orifice
- Connect using Modbus RTU/ASCII over isolated RS-485 or 4-20 mA analog Output
- Complies with ISO 21501-4 and JIS B9921 standards
- Easy to clean and wipe down with minimal particle traps
- Versatile mounting options
- Alarm light
- LED Indicators
- Seamless integration into a facility monitoring system
- Lightweight stainless steel enclosure
- 2 year limited warranty. Extended warranties available.

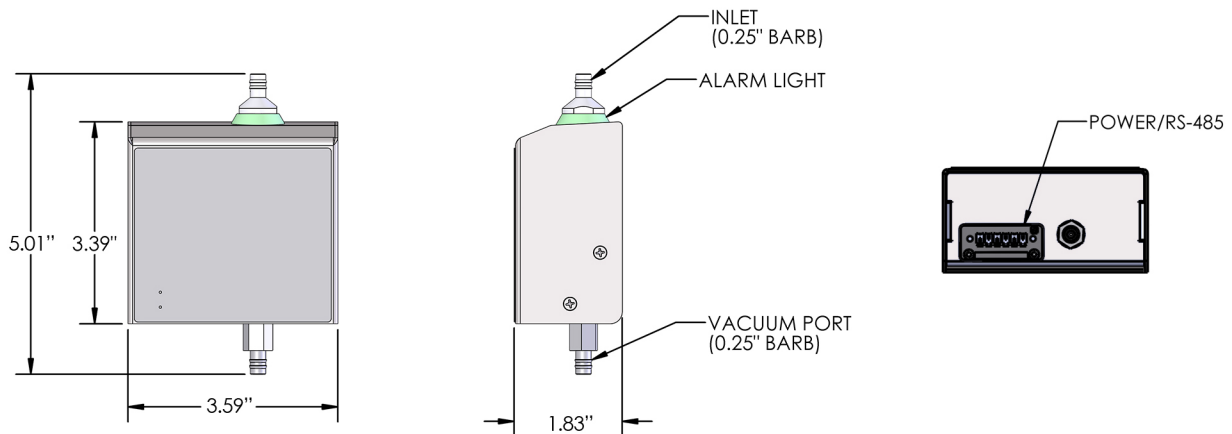



## Specifications

Model	2510	2510-2
Size Range	0.5 $\mu\text{m}$ to 25.0 $\mu\text{m}$	0.5 $\mu\text{m}$ to 25.0 $\mu\text{m}$
Size Channels	Factory calibrated at 0.5, 1.0, 2.5, and 5.0 $\mu\text{m}$	Factory calibrated at 0.5 and 5.0 $\mu\text{m}$
Number of Channels	4 channels	2 channels
Counting Efficiency	50% @ 0.5 $\mu\text{m}$ ; 100% for particles > 0.75 $\mu\text{m}$ per JIS	
Flow Rate	1.0 CFM (28.3 LPM)	
Concentration Limits	1,500,000 particles/ft <sup>3</sup> @ 10% coincidence (per ISO 21501-4), 3,000,000 particles/ft <sup>3</sup> @ 10% coincidence (as tested and validated <sup>1</sup> )	
Light Source	Long life laser diode	
Zero Count	< 1 count / 5 minutes (< 1 particles / 15ft <sup>3</sup> ). No fault count subtraction.	
Calibration	NIST traceable	
Vacuum Requirements	External vacuum > 15" (38.1cm) of Hg	
Airflow	Internally monitored	
Alarm	Alarm LED ring	
Communication Modes	MODBUS™ RTU, ASCII outputs (over isolated RS-485), or 4-20 mA analog Output	
Standards	ISO 21501-4 and JIS B9921	
Instrument Calibration	Recommended minimum once per year	
External Surface	Stainless steel	
Dimensions (L x W x H)	1.83" x 3.59" x 5.01" (4.6 x 9.1 x 12.7 cm) including probes and connectors	
Weight	1.65 lb. (0.75 kg)	
Accessories	Wiring Connector, operating manual on USB flash drive	
Optional Accessories	Power Supply, Remote Mounting Bracket, Stainless Steel Barbed Isoprobe (1.0 CFM/28.3 LPM), Filter Assembly, and Sample & Vacuum Tubing	
Sample Time	1 second to 18 hours	
Power	9 - 24 VDC (< 2.5 watts)	
Operating Conditions	41° to 104°F (5° to 40°C) / 20% to 95% non-condensing	
Storage Conditions	32° to 122°F (0° to 50°C) / Up to 98% non-condensing	
Warranty	2 year limited warranty. Extended warranties available.	

1- Validated by independent analysis see paper available at [www.particlesplus.com/aac2022\\_paper](http://www.particlesplus.com/aac2022_paper)

PAT. <https://particlepatents.com/> Additional Patents Pending.  
 Particles Plus, Inc. reserves the right to change specifications without notice.  
 Contact [hello@particlesplus.com](mailto:hello@particlesplus.com) or your local distributor for more details.  
 Particles Plus and the Particles Plus logo are trademarks of Particles Plus, Inc.  
 ©2024 Particles Plus, Inc. All rights reserved.

REV 20240318-2510/2510-2



31 Tosca Drive  
 Stoughton, MA 02072 U.S.A.  
 +1-781-341-6898  
[www.particlesplus.com](http://www.particlesplus.com)